



## Technical Brief

# Specialty Compounds for PUMPS

## Customized Thermoplastic Solutions

### Thermoplastic Compounds Can:


- ▶ Increase product reliability
- ▶ Simplify product maintenance
- ▶ Reduce costs
- ▶ Extend product life
- ▶ Reduce weight
- ▶ Resist corrosion
- ▶ Improve wear properties
- ▶ Reduce static buildup

*The chemical resistance of an RTP Company glass fiber/polypropylene compound provides security against corrosion for parts used in fluid handling pumps. The pump is lightweight, weighing 18 pounds. Metal versions of the same pump weigh up to 42 pounds. There are no secondary finishing operations needed.*

Fluid handling pumps are a common piece of industrial equipment, second only to electric motors. The market has enjoyed steady growth over the last decade, since many industries rely on pumps to move water, acids, lubricants, solvents, chemicals, and fuels.

Metals have been the traditional choice of pump manufacturers for housings, impellers, seals, and other elements.

*However, the desire for improved manufacturing efficiencies has led designers to thermoplastic compounds as excellent candidates to replace metals or unfilled resins.*

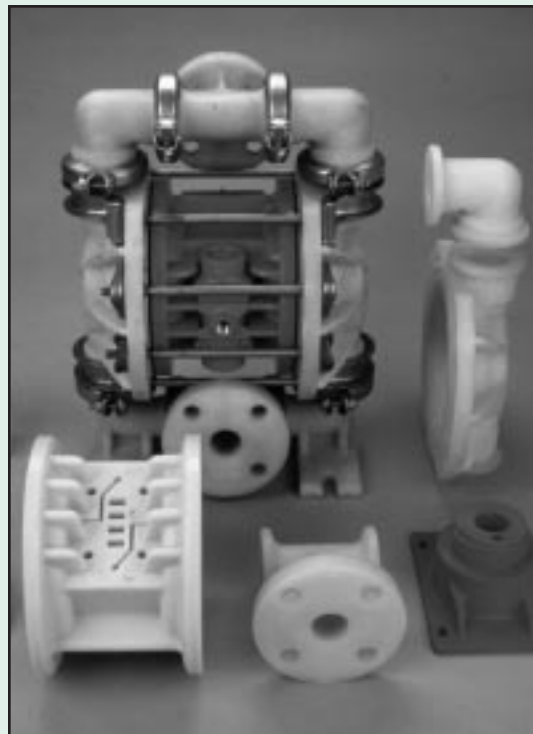

Plastic compounds offer a combination of physical strength, wear resistance, self-lubrication, and cost effectiveness (both material and processing costs). They are superior to metals in corrosive environments, and they are chemically resistant. Smooth surfaces for better wear performance are achieved without secondary operations.

Choosing the right thermoplastic for your pump application depends on several factors, which can vary significantly, such as pressure, temperature, and speed. Additionally, the corrosive nature of many chemicals, the abrasive characteristics of liquids or slurries, the degree of contamination that can be tolerated, and projected uses for the pump must also be considered.

### ▶ Choose RTP Company specialty compounds for:

- Pump Housings
- Propellers
- Impellers
- Diffusers
- Rotors and Vanes
- Housing Liners
- Rotary Pump Lobes and Gears
- Seals
- Containment Shells
- Bushings
- Flow Control Valves

*There is no one material—either plastic or metal—that is perfect for all pump environments. As a privately-owned specialty compounder, RTP Company develops solutions that meet your unique requirements. We independently select from a wide range of resins and additives to give you the optimum balance of cost and performance.*

## Resins

Semi-crystalline resins are an excellent choice for pump applications due to their combination of chemical resistance, fatigue resistance, and high duty cycles.

### General Purpose Resins

**Polypropylene** (RTP 100 Series) - Economical industry standard with superior resistance to strong oxidizing acids and a broad range of waste streams. Good abrasion resistance; relatively high temperature tolerance; good choice for process fluids, and industrial effluents.

**Nylon 6/6** (RTP 200 Series) - Low coefficient of friction; excellent chemical resistance and electrical properties.

**Nylon 6/12** (RTP 200D Series) - A low moisture-absorbing nylon with high strength, heat resistance, and chemical resistance.

**High Density Polyethylene/HDPE** (RTP 700 Series) - Good chemical resistance and electrical properties. Glass reinforcement improves its thermal expansion, strength, rigidity and temperature resistance.

**Acetal** (RTP 800 Series) - Rigid, creep resistant and strong. Low coefficients of friction; stable in elevated temperatures; good resistance to hot water environments.

**Polybutylene Terephthalate** (RTP 1000 Series) - Crystallizes rapidly, so mold cycles are short and molding temperatures can be lower than for many engineering plastics. Very good dimensional stability, high heat resistance, chemical resistance and good electricals.

**Polyphenylene Sulfide/PPS** (RTP 1300 Series) - High temperature resistance; flame retardance; chemical resistance; dimensional stability; good electrical characteristics.

**Polyetheretherketone/PEEK™** (RTP 2200 Series) - High temperature thermoplastic with excellent chemical resistance; high strength; non-flammable.

**Aliphatic Polyketone** (RTP 4500 Series) - Desirable combination of toughness, stiffness, and thermal characteristics. Low permeability and good chemical resistance.

### Fluoropolymers

**Perfluoroalkoxy/PFA** (RTP 3100 Series) - High temperature capability (up to 500°F/260°C); excellent chemical resistance (including oxidizing agents); excellent solvent resistance; non-flammable; low coefficient of friction.

**Ethylene Tetrafluoroethylene/ETFE** (RTP 3200 Series) - Abrasion resistance with outstanding impact strength and fatigue resistance. High resistance to aggressive chemicals. Heat resistant with a maximum temperature exceeding 400°F (204°C). Low coefficient of friction.

**Polyvinylidene Fluoride/PVDF** (RTP 3300 Series) - Tolerant of high sustained temperatures; excellent for handling process fluids that are extremely corrosive or abrasive; high strength; excellent weatherability; good solvent resistance; non-flammable.

**Fluorinated Ethylene-Propylene/FEP** (RTP 3500 Series) - Excellent chemical resistance (including oxidizing agents); excellent solvent resistance; non-flammable; low coefficient of friction; low dielectric constant; low water absorption.

## Additives

**Graphite** - Ideal lubricant for many underwater applications.

**Short Glass Fiber** - Improves mechanical and thermal performance of compound. Increases coefficient of friction and mating surface wear.

**Long Glass Fiber** - Dramatically increases impact strength without sacrificing flexural modulus. Improved mechanicals over short glass fibers, particularly in pump housings. Excellent alternative when short glass fiber fails to provide sufficient performance.

**Carbon Fiber** - Improves mechanical and thermal performance. Provides best stiffness. Lowers coefficients of friction. Softer and less abrasive than glass fiber. Helps dissipate static electricity.

**PTFE** - Lowest coefficient of friction of any internal lubricant. Forms a lubricious film on part surface. Modifies mating surface after initial break-in period. Facilitates higher dynamic load bearing.

*These charts are a starting point for materials development. RTP Company can modify and customize materials to meet your physical strength, wear resistance, chemical resistance, conductive, and other requirements.*



This all-plastic control valve for high-pressure fluids is completely corrosion resistant and reduces weight by more than 50% over metal versions. All the black components, including the bonnet, pneumatic actuator, and T-intersection, are molded with an RTP 4000 Series reinforced PPA compound. The shell and core design provides tremendous strength and impact resistance while preventing the white PTFE parts from creeping under excessive temperatures and pressure.

The material is heat stabilized and displays tensile strength of 34,000 psi (234 MPa), notched IZOD impact strength at 1/8 in of 5.0 ft lbs/in (267 J/m), and flexural modulus of 2.50 psi x 10<sup>6</sup> (17225 MPa).

*Data sheets on RTP Company compounds are available on our website at [www.rtpcompany.com](http://www.rtpcompany.com) or by calling Customer Service at 1-800-433-4787.*



*RTP Company utilizes a broad range of injection molding, thermoforming, extrusion, and testing equipment for product and process evaluations. Our Technical Service department provides expert assistance in processing considerations, molding trials, troubleshooting, and other customer needs. Arrangements for on-site visits can be scheduled through your sales representative or directly with our Technical Services group.*



# Specialty Compounds for PUMPS

## ► Representative Compounds

Successful pump applications rely on the right choice of materials to optimize your design. Instead of offering off-the-shelf commodity products, RTP Company's engineers work closely with you to develop a unique compound that delivers just the right combination of performance and price.

Resin	RTP Product	Typical Applications	Design Considerations
Acetal	ESD 800 TFE 10	Housings related to fuel pumps	Low moisture absorption. Dissipates static buildup. Wear resistant.
ETFE	RTP 3283	Impeller and containment shell for magnetic sealless pumps	Low coefficient of friction. Carbon fiber increases strength and rigidity. Excellent resistance to acids and corrosives.
HDPE	ESD C 703	Nozzle holder between vacuum breaker and pump	Chemical resistance to fuel. Conductive to bleed off static charges. Reinforced to withstand vacuum pressures.
Nylon	RTP 0299 X 68919 A (Long Fiber)	Impellers, housings, propellers	Better mechanical and impact properties. Long-term creep and fatigue resistance. Stabilized for elevated temperatures. Dimensionally stable.
Nylon 6/12	RTP 207 D	High pressure housings	Chemical resistance. Good for water applications. Mechanical properties a plus.
PBT	RTP 1001 GB 15 TFE 5	Impellers, Diffusers, Housings	Compatible with potable water. Low water absorption and low shrink. Good chemical resistance.
PEEK™	RTP 2282 LF TFE 15	Scroll tip seal in air conditioning compressors	Wear resistance and stiffness. Superior high temperature performance to prevent leaking.
PEEK™	RTP 2285 TFE 10	Bushings, impellers, rotor vanes, lobes, and gears in rotary pumps	Wear and chemical resistance. Superior high temperature performance. Dimensional stability. Long lasting, even with mating surface contact. Reduced noise. High Pressure*Velocity capability.
PP	RTP 105 CC	Housings, diaphragm pump components	Good balance of cost and chemical resistance. Impact strength. Compatible with broad range of fluids including potable water. Better mechanical properties compared to unfilled resins. Colorable.
PP	RTP 0199 X 70836 A (Long Fiber)	Impellers, housings, propellers, flow control valves	Good mechanical and impact properties. Long-term creep and fatigue resistance. Cost effective and chemically resistant.
PPS	RTP 1307	Housing, impellers	Chemical and creep resistant. High strength and modulus. High temperature performance. Dimensional stability.
PPS	RTP 1385	Impellers, housings, rotary pump components	Chemical and creep resistant. Extra strength and modulus. Low coefficient of friction. High temperature performance. Dimensional stability.

PEEK™ is a trademark of Victrex plc.

No information supplied by RTP Company constitutes a warranty regarding product performance or use. Any information regarding performance or use is only offered as suggestion for investigation for use, based upon RTP Company or other customer experience. RTP Company makes no warranties, expressed or implied, concerning the suitability or fitness of any of its products for any particular purpose. It is the responsibility of the customer to determine that the product is safe, lawful and technically suitable for the intended use. The disclosure of information herein is not a license to operate under, or a recommendation to infringe any patents.



RTP Company  
P.O. Box 5439  
580 East Front Street  
Winona, MN 55987

Tel: 1 (800) 433-4787  
1 (507) 454-6900  
Fax: 1 (507) 454-8130

Web: [www.rtpcompany.com](http://www.rtpcompany.com)  
Email: [rtp@rtpcompany.com](mailto:rtp@rtpcompany.com)

